



Installation Instructions (Double door)


Double Door Installation (Mounting holes same as tab-mount)

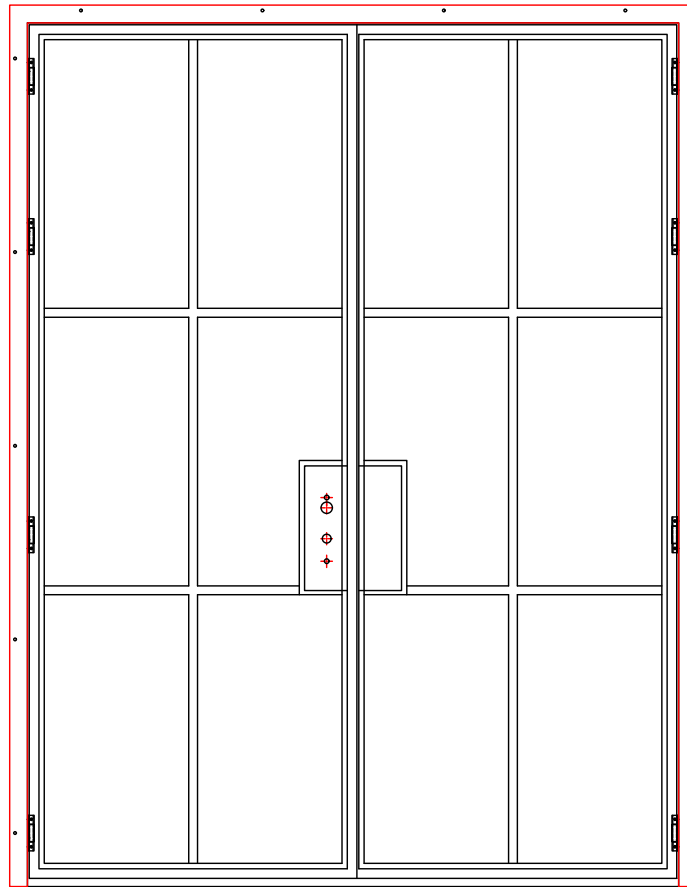


Step1: Confirm rough opening size, clean debris, and check level & plumb. If uneven, use wood blocks to adjust and ensure proper alignment.

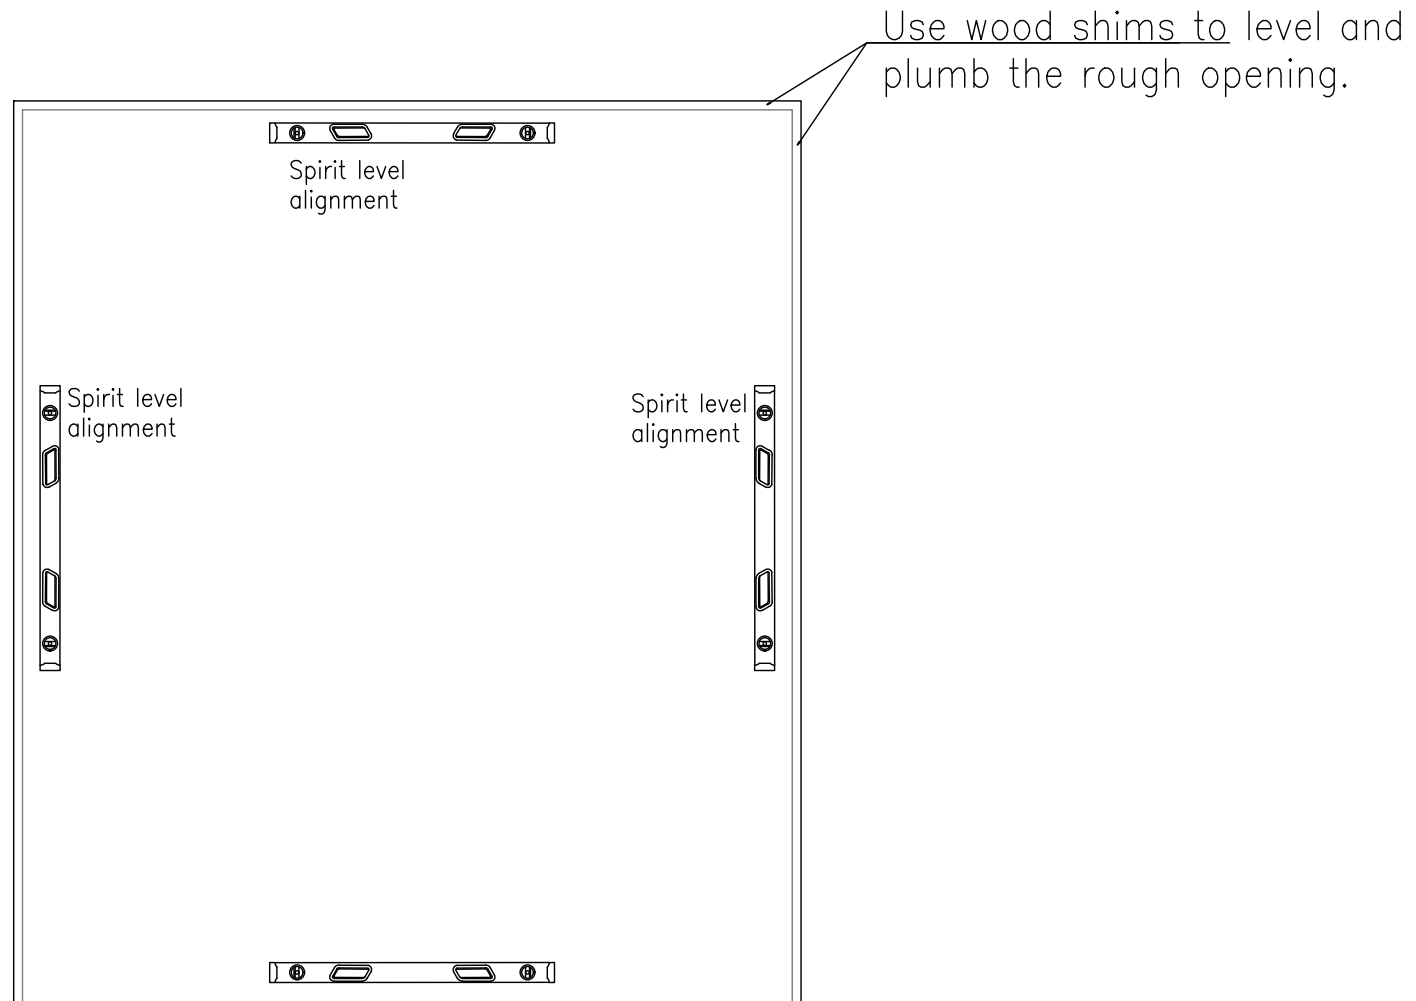


Step 2: Unpack the door, place it in the opening, use spacer blocks in the gaps, and ensure it is level and plumb.

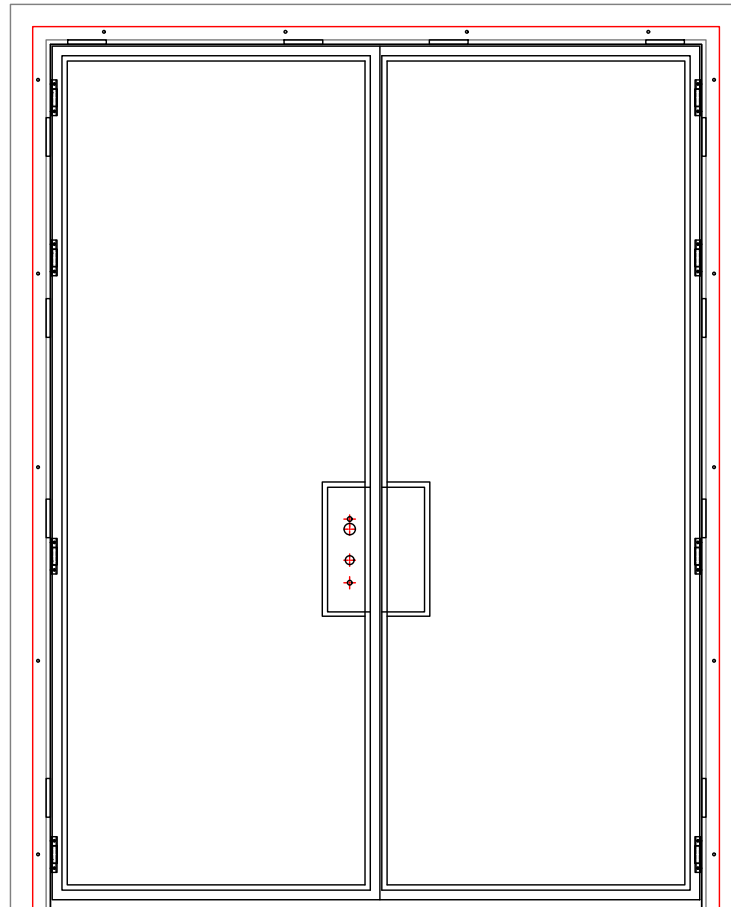

Step 3: Open the door slightly(at an angle suitable for screw installation), support the bottom with wooden blocks, raise it about 1 mm, then install screws.

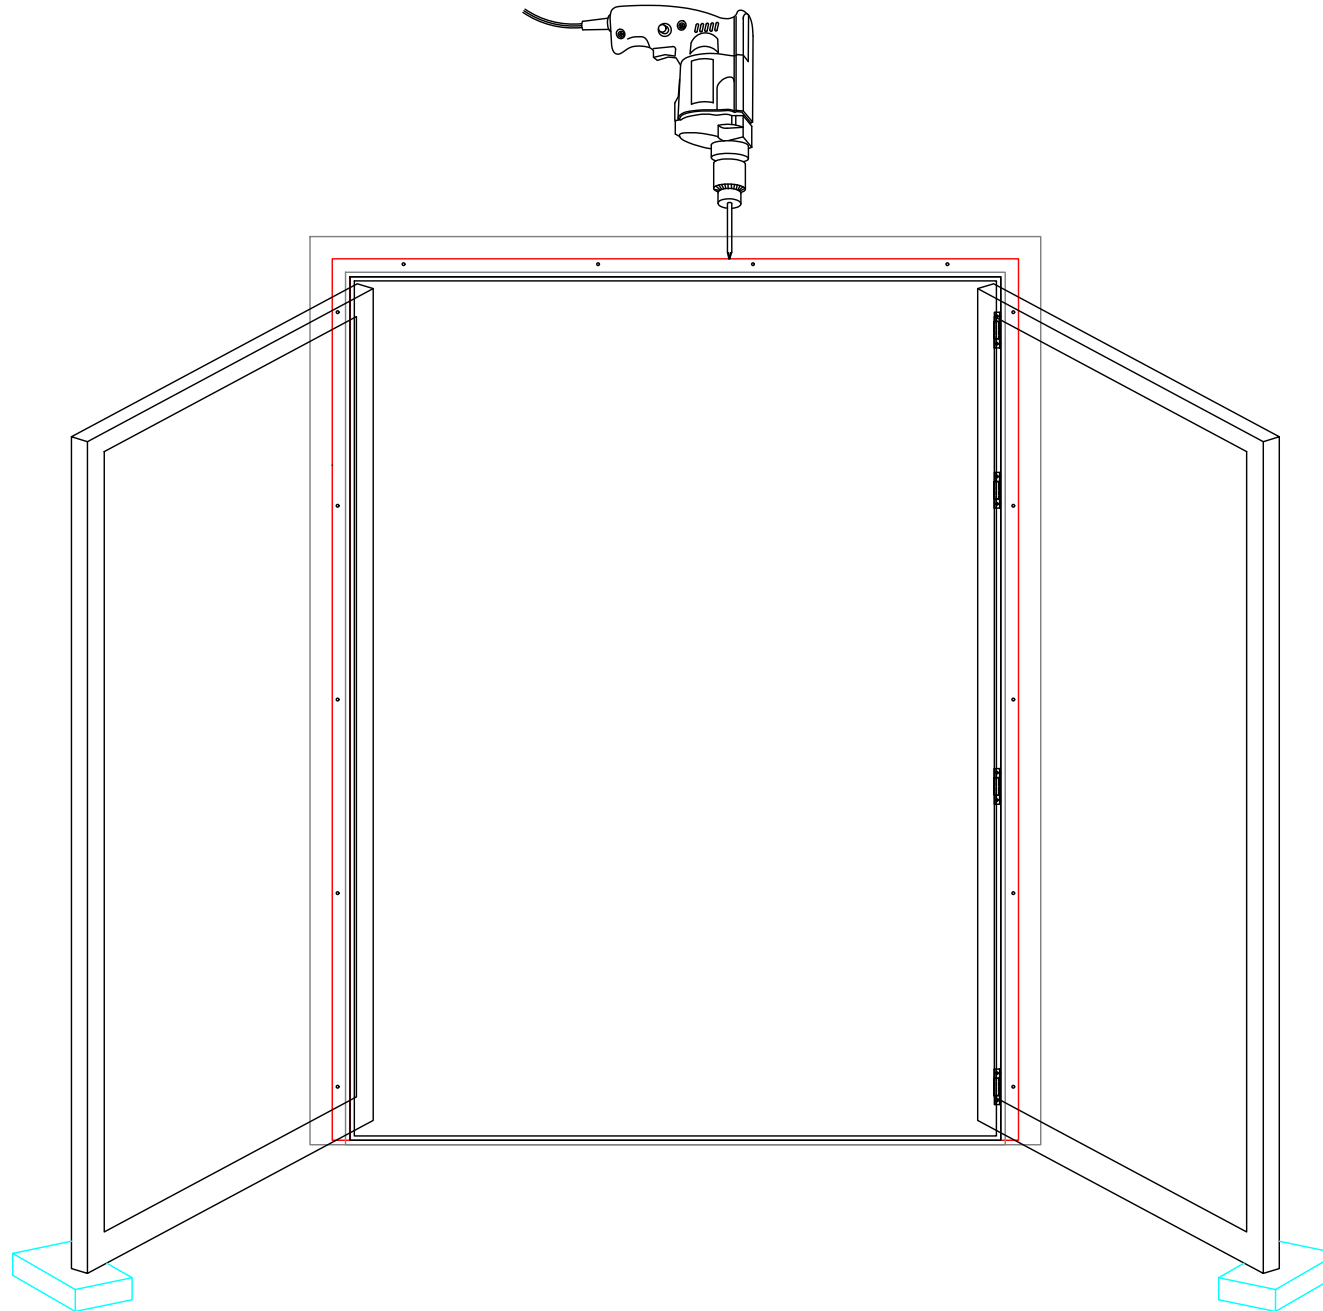

Step 4: Install the lock body by inserting it through the side opening, align the screw holes, and secure it with screws. If a separate lock cover is provided, fix it to the lock body with screws. Then install the lock cover, align the handle and keyhole with the pre-cut openings on both sides of the door, and tighten the screws on the cover to complete the installation.

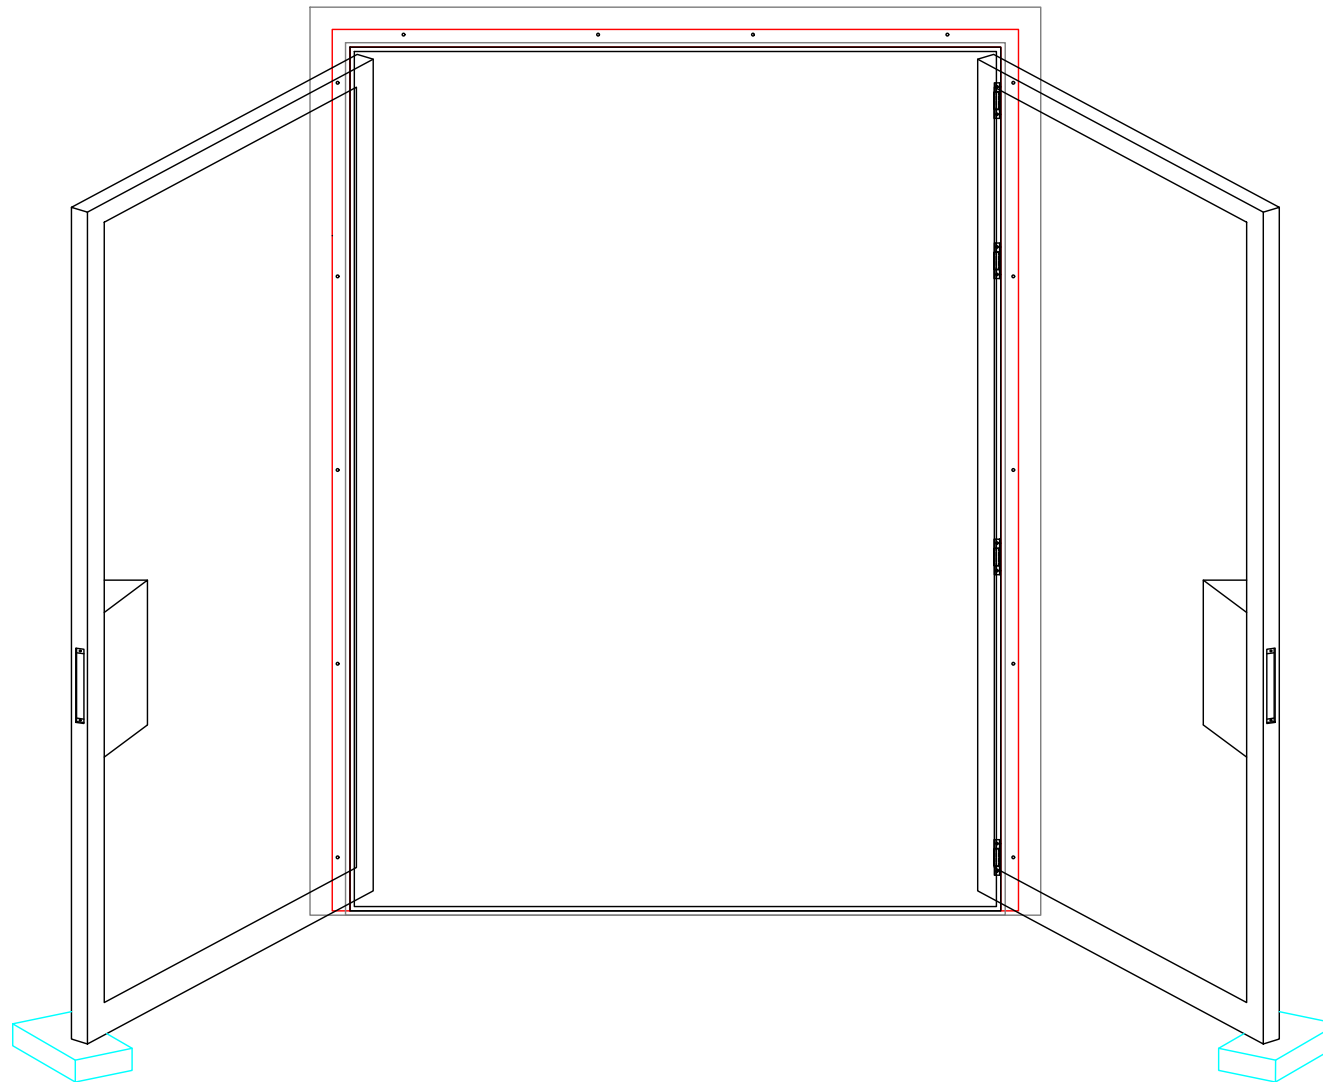

Step 5: After installing the lock body and cover, remove the spacer blocks under the door, check smooth operation, ensure the lock functions properly, and verify the top & bottom flush bolts operate correctly.

Note: If the door sags or drags, use hinge shims (0.5 mm or 1.0 mm) as shown. Insert into the hinge gap and adjust until the door operates smoothly. 

